
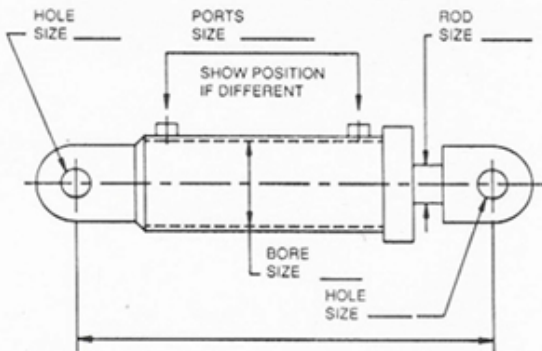







CUSTOMER INFORMATION

NAME _____ TITLE _____
 FIRM _____
 ADDRESS _____
 CITY _____ STATE _____ ZIP _____



TYPE

- Double Acting Single Acting
 RAM

PORTS

- Size _____ Style NPTF
 SAE O'RING
 Other _____

PRESSURE

- 2500 PSI Shock
 3000 PSI No Shock
 Other _____ PSI

FLUID

- Petroleum Base Hydraulic Fluid
 Other _____

ROD

Diameter _____ inches

STYLE

- Plain Rod Clevis
 Female Thread Cross Tube
 Male Thread ID _____ Tube
 PIN Eye Length _____ Tube

SPEED

Feet Min. _____
 System GPM _____

MOUNT

- None Clevis Mount
 Cross Tube Other
 PIN Eye

APPLICATION

- Industrial
 Mobile
 Light Duty
 Medium Duty
 Heavy Duty

STROKE _____
 INFORMATION _____

QUOTATION INFORMATION

Quantities _____
 Prototype Required Quantity _____
 Cylinder is for New Existing Product
 Annual Usage _____